ASSEMBLY AND INSTALLATION INSTRUCTIONS

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF WARNING: POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

Installation Steps.

1. Carefully unpack and lay all parts on a clean, level surface.

2.Place the mounting plate(A) on the outlet box and mark the wall according to the location of the mounting hole. Then place four plastic anchors on the wall.

3. Attach the mounting plate(A) to the out let box using two outlet box screws(B). Then use a 4pcs tapping screw to run it through a mounting plate(A) mounting hole and lock it onto a plastic anchor. 4. Make wire connections :

--Attach the ground wire to house ground wire using a wire nut.

(Or attach them to the mounting plate (A) with a green ground screw.

--Attach white wire from light to white wire from power source with a wire nut.

--Attach black wire from light to black wire from power source with a wire nut.


5.Attach the back plate (C) to mounting plate (A) by using a mounting screw (D).

6.Install bulbs. (Please do not exceed the maximum capacity which is recommended on the fixture.)

7.Insert one end of glass shade (G) into cap (F) then then fasten cap (H) onto the other end of glass shade (G).

8. Secure the glass shade (G) to the caps by tightening the bushing (I).

9. Turn power on at fuse or circuit box.

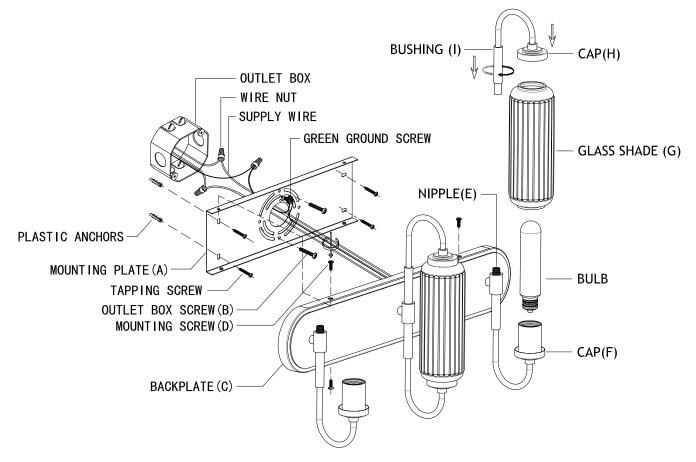

5015-3-47 # 5015-4-47